


# SUGGESTED FLOAT SWITCH POSITIONS

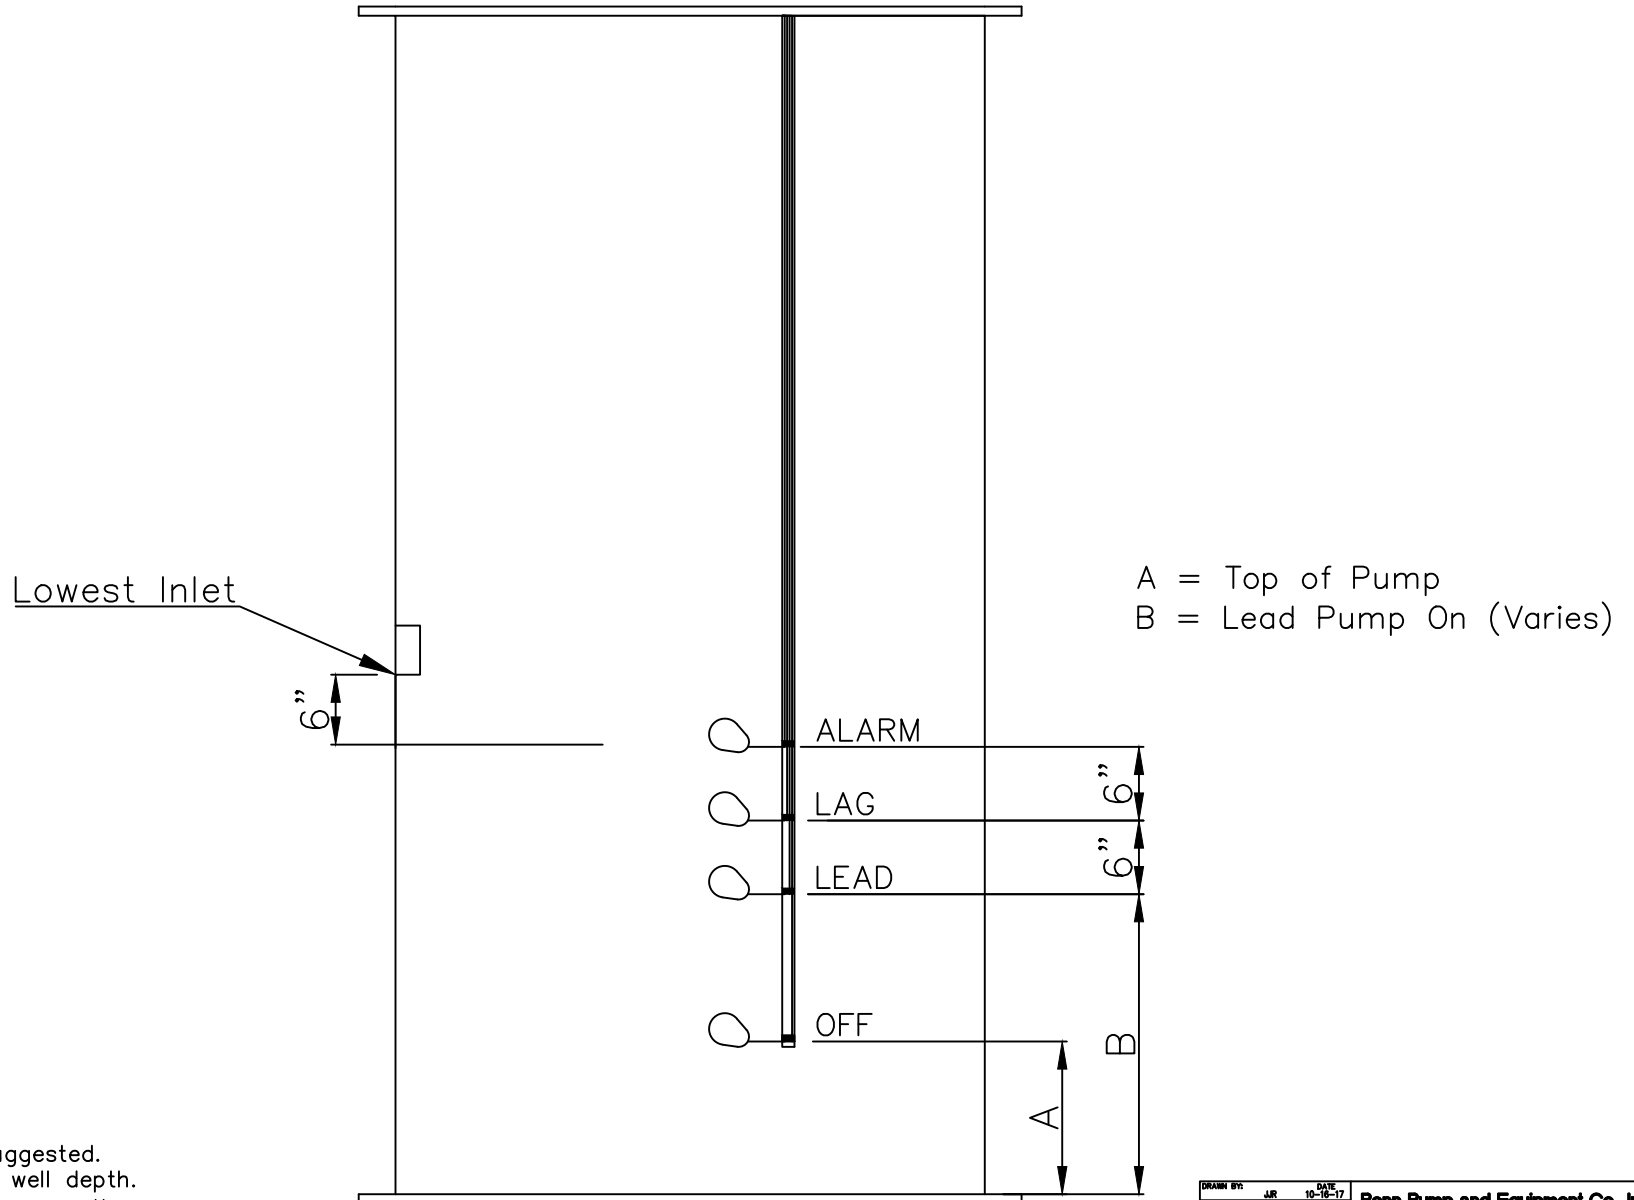

**Notes:**

- 1.) Measurements are suggested. Adjust based on wet well depth.
- 2.) For simplex systems, move the Lead float to the Lag float position. Delete the Lag Float.

<table border="1"> <tr> <td>DRAWN BY:</td> <td>JLR</td> <td>DATE:</td> <td>10-16-17</td> </tr> <tr> <td>CHECKED BY:</td> <td>DC</td> <td>DATE:</td> <td>10-16-17</td> </tr> <tr> <td>ISSUE DATE:</td> <td colspan="3">10-16-17</td> </tr> </table>	DRAWN BY:	JLR	DATE:	10-16-17	CHECKED BY:	DC	DATE:	10-16-17	ISSUE DATE:	10-16-17			<b>Penn Pump and Equipment Co., Inc.</b>		
DRAWN BY:	JLR	DATE:	10-16-17												
CHECKED BY:	DC	DATE:	10-16-17												
ISSUE DATE:	10-16-17														
<b>Suggested Float Switch Positions</b>															
<table border="1"> <tr> <td>SIZE:</td> <td>FORM NO.:</td> <td>JOB. NO.:</td> <td>REV.:</td> </tr> <tr> <td>A</td> <td></td> <td>-</td> <td>A</td> </tr> </table>	SIZE:	FORM NO.:	JOB. NO.:	REV.:	A		-	A							
SIZE:	FORM NO.:	JOB. NO.:	REV.:												
A		-	A												
<table border="1"> <tr> <td>APPROVED BY:</td> <td>DATE:</td> <td>SCALE:</td> <td>SHEET 1 OF 1</td> </tr> <tr> <td>DC</td> <td>10-16-17</td> <td>NONE</td> <td></td> </tr> </table>	APPROVED BY:	DATE:	SCALE:	SHEET 1 OF 1	DC	10-16-17	NONE								
APPROVED BY:	DATE:	SCALE:	SHEET 1 OF 1												
DC	10-16-17	NONE													