
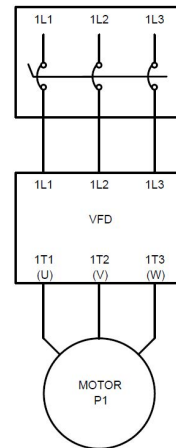
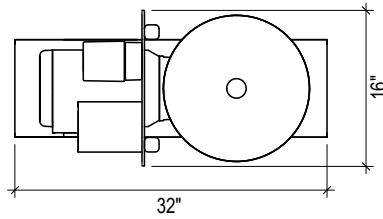


WATER PRESSURE BOOSTER SYSTEMS

Posi-Boost

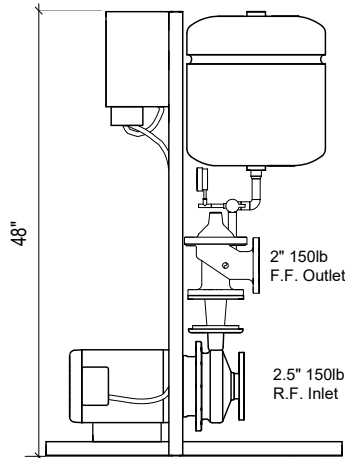

STANDARD STOCK SYSTEMS					
	PB-200	PB-300	PB-500	PB-750	PB-1000
Pump Horsepower	2	3	5	7.5	10
Shipping Weight LBS	190	190	200	200	225
Available Voltages	208-230/460/3	208-230/460/3	208-230/460/3	208-230/460/3	208-230/460/3
Full Load Motor Amperages	208v	7.5	10.6	16.7	30.8
	230v	6.8	9.6	15.2	28
	460v	3.4	4.8	7.6	11

Maximum Working Pressure 150 PSI
Single phase available upon request

POSI-BOOST SYSTEM SELECTION							
Pressure Boost (PSI)							
		20	30	40	50	60	70
Flow (GPM)	50	PB-200	PB-200	PB-300	PB-500	PB-500	PB-500
	60	PB-200	PB-200	PB-300	PB-500	PB-500	PB-500
	70	PB-200	PB-200	PB-300	PB-500	PB-500	PB-750
	80	PB-200	PB-300	PB-500	PB-500	PB-500	PB-750
	90	PB-200	PB-300	PB-500	PB-500	PB-750	PB-750
	100	PB-200	PB-300	PB-500	PB-500	PB-750	PB-750
	110	PB-200	PB-300	PB-500	PB-500	PB-750	PB-750
	120	PB-200	PB-300	PB-500	PB-750	PB-750	PB-750
	130	PB-300	PB-500	PB-500	PB-750	PB-750	PB-1000
	140	PB-300	PB-500	PB-500	PB-750	PB-750	PB-1000

Larger sizes available upon request

Multiplex Option:
(Up to 8 units in parallel)

- Duplex
 Triplex
 Other: _____

SUGGESTED SPECIFICATION

Furnish and install a Posi-Boost water pressure booster system as manufactured by **Penn Pump & Equipment Company, Inc.**, of Hatfield, PA. The packaged and tested system shall be capable of multiplex system operation and shall be complete with an all-stainless-steel pump, a NEMA 1 variable speed pump controller with disconnect switch, and a hydropneumatic tank for no flow shut down. The packaged pumping system shall be factory assembled and tested with 304 Stainless Steel and shall include a thermal safety purge valve and pressure gauge. Prior to shipment, the Posi-Boost water pressure booster system shall be painted with a high-grade enamel. The complete packaged and tested system shall be certified and labeled to NSF/ANSI 61 & 372 standards.



Certified to
NSF/ANSI 61 & 372

SPECIFY WITH CONFIDENCE, SPECIFY PENN PUMP SYSTEMS